

8位输出端子模块

S082

8 bit output terminal block S082

● 特点

Features

本接线板为终端输出型插口板，对应各种终端输出信号连接使用；  
配有8组2P信号输入口，可接入2线制或3线制信号；  
使用10P端子台与控制器端连接，方便进行远程控制使用；  
采用动作LED显示，动作状态一目了然；

This terminal board is a terminal input panel, applicable to the connection of all kinds of terminal input signals;  
It has 8 sets of 2pin signal input ports which can accept 2-wire or 3-wire system signals;  
A 10pin terminal block is used to connect the controller, convenient for remote control;  
Utilizes LED display to display operating status.

● 部品详细参数

Pats detailed pameters

|              |                           |              |                                  |                |
|--------------|---------------------------|--------------|----------------------------------|----------------|
| MIL<br>插孔连接器 | 主体材料<br>Body Material     | PBTV-0防火等级   | 参考标准<br>Reference Standard       | UL             |
|              | 端子材料<br>Terminal Material | 铜合金          | 额定电流<br>Rated current            | 2.0A           |
|              | 电镀层<br>Plating            | 针角镀金         | 接触电阻<br>Contact resistance       | <20毫欧          |
| 欧式接线端子       | 主体材料<br>Body Material     | PA 66V-0防火等级 | 认证<br>Authenticate               |                |
|              | 端子材料<br>Terminal Material | 磷铜           | 额定电流<br>Rated current            | 10A            |
|              | 电镀层<br>Plating            | 镀锡           | 扭矩<br>Torque                     | 0.4NM(3.9b-in) |
| 端子主体         | 主体材料<br>Body Material     | PA 66V-0防火等级 | 认证<br>Authenticate               | CE             |
|              | 端盖材料<br>Cover Material    | PC V-0防火等级   | 固定螺丝材料<br>Fixing screws Material | SUS304         |
|              | 扣件<br>Fasteners           | PC V-0防火等级   | PCB板材料<br>PCB board material     | FR-4           |

● 发货日期

Ship Date

|                                                                                                                                            |                     |                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------|
| 17:00前订购的库存品可以当日发货<br><small>Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small> | 1~8个<br>1-8 pcs     | 9个以上<br>More than 9pcs           |
|                                                                                                                                            | 次日（当日）发货<br>1-2 day | 另定发货时间<br>Agreed by both parties |

- 1.最小起订量1个正常交期7~10天；  
2.特殊产品交期20天以上；  
3.非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models  
2: more than 20 days for customized models  
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品


Related products

|                            |
|----------------------------|
| L116-2<br>L116-3<br>L110-1 |
|----------------------------|

注：见本册缆线系列

● 剥线长度

Wire stripping Recommendation

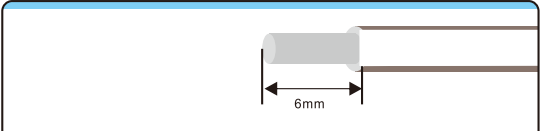

● 输入侧额定值/性能

Rated current and voltage specification

|                                   |                           |
|-----------------------------------|---------------------------|
| 额定电流<br>Nominal operating current | 1A                        |
| 额定电压<br>Nominal coil voltage      | DC24V                     |
| 适合电线<br>For wire                  | 1.5 mm² Following / AWG16 |


输入/输出侧对应

Corresponding Input/Output Devices

|                                       |                                            |
|---------------------------------------|--------------------------------------------|
| 输出侧对应<br>Corresponding output Devices | Photoelectric Switch, Button Switch, Fiber |
|---------------------------------------|--------------------------------------------|


外形图

Dimensions

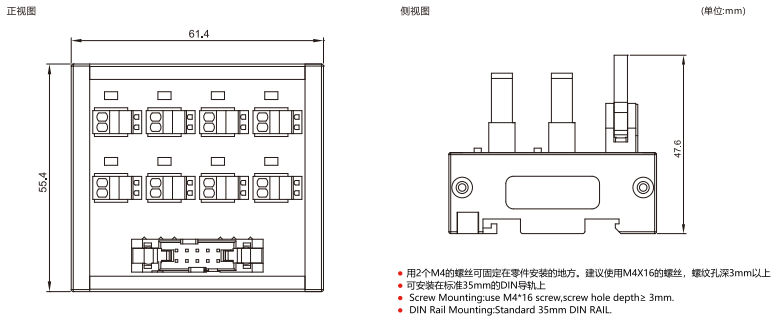

配线图

Wiring Diagram

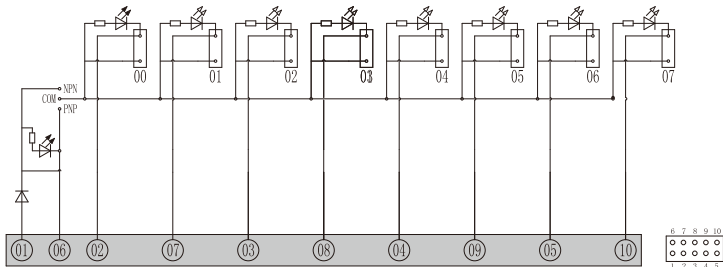

S082